

TYPICAL

GT 6430/6438/6439 D



ELECTRONIC DIRECT-DRIVE LOCKSTITCH BAR TACKER //
BUTTON SEWER

ELEKTRON. DOPPELSTEPSTICH-RIEGELAUTOMAT //

KNOPFANNÄHAUTOMAT MIT DIREKTANTRIEB



GT 6430/6438/6439 D



MAX SEWING SPEED

- » 3.200 spm (GT 6430D),
- » 2.700 spm (GT 6438D/6439D)



EQUIPMENT:


- » X-Y -Drive controlled by 2 stepping motors;
- integrated Direct-Drive (550 Watt);
- machine work without compressed air;
- oil-free needle, no oil stand on material;
- thread ends after cutting about 2.0–2.5 mm;
- 89 (GT6430D) / 49 (GT6438D) sewing programs in machine memory;
- data transfer by SD-Memory Card;
- 50 customized programs can be stored;
- memory capacity of 210,000 stitches;

MAX. NÄHGESCHWINDIGKEIT

- » 3.200 Stiche/Min. (GT 6430D),
- » 2.700 Stiche/Min. (GT 6438D/6439D)

AUSSTATTUNG:

- » X-Y -Antrieb gesteuert über 2 Schrittmotoren;
- Integrierter Direktantrieb (550 Watt);
- Maschine benötigt keine Druckluft;
- Ölfreie Nadelstange, dadurch kein Verschmutzen des Nähguts;
- Fadenenden nach dem Schneiden ca. 2,0–2,5 mm;
- 89 (GT6430D) / 49 (GT6438D) Riegelprogramm im Maschinenspeicher;
- Datenübertragung mittels SD-Memory Karte;
- 50 kundenspezifische Programme speicherbar;
- Speicherkapazität 210.000 Stiche;

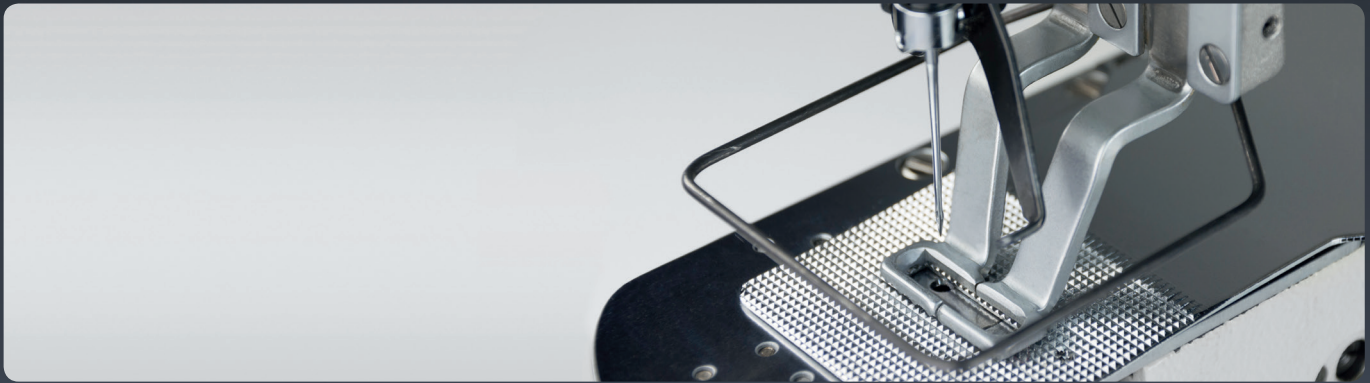

Clamp
Lift*



» GT XXXX D

	-01				134/DPx5 70–90				
6430		3.200	-	0.1–12.7	135x17/ DPx17 100–120	23x13 mm	17	40x30	
	-02								
6438									
		2.700	shank button	0.1–6.4	135x17/ DPx17 70–90		13	6.4x6.4	
6439									

VETRON TYPICAL EUROPE GmbH

Clara Immerwahr Str. 6
D-67661 Kaiserslautern
Tel.: +49 (0)6301 32075-0
Fax: +49 (0)6301 32075-11

E-Mail: sales@vetrontypical.com
www.vetrontypical.com

